


Name	Patch Cord	Specification	LCUPC-LCUPC-SM-D-LM-3.0mm	File NO.	SD-P02096-ENG	Version	REV.01
------	------------	---------------	---------------------------	----------	---------------	---------	--------

Description: **LCUPC TO LCUPC Single-mode OS1 Duplex 3.0mm Patch cord**
Available on lengths 1m, 2m, 1.5m and 3m

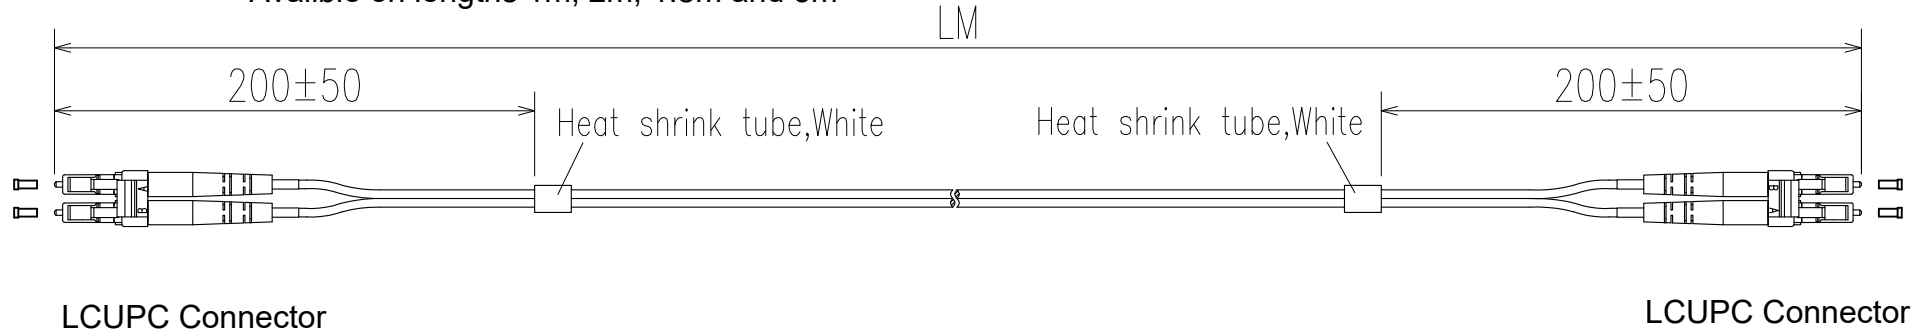


Connector Housing and Boot Color

Connector Type	Housing Color	Boot Color
LC 3.0mm Connectors	Blue	White
LC 3.0mm Connectors	Blue	White

Channel information
A-----B
B-----A

Note:

1. Fiber cable according to IEC 60793-2;
2. End surface test is according to WI-QJ-021;
3. Test standard: $IL \leq 0.2dB, RL > 50dB @ 1310nm$;
4. ROHS & IEC Compliant
5. Tensile Strength of 70N or Higher
6. Operating Temperature $-20 \sim 70^{\circ}C$

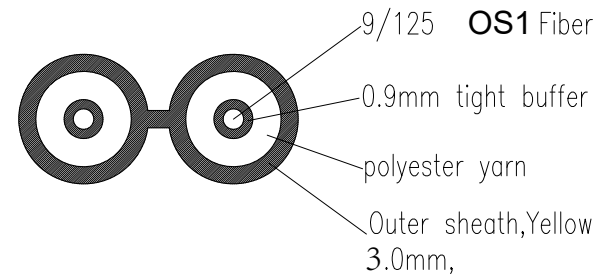

∅3.0mm cable section

LENGTH(L)	TOLERANCE
$L \leq 1M$	+50mm/0
$1M < L \leq 3M$	+100mm/0
$3M < L \leq 10M$	±100mm
$10M < L \leq 30M$	±150mm
$L > 30M$	±200mm