


A B C D E F G H

△	Rav	Detail	Rav	Date
△	A	NEW RELEASE	Kelvin	2013-09-24
△				

LC/UPC Ø0.9mm OS2 LSZH tight-buffered Cable Pigtail

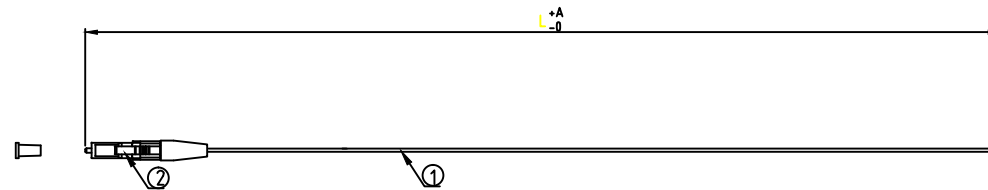

Length (M)	Min	Max	Unit
L<1.5	0	50	mm
L>=1.5	0	5	%

Noto

- All parts compliant with RoHS
- Compliance with Telcordia GR326
- Optical Performance

1. Wide:25mm,Length:30mm;
2. S/N: The date of production +Sequential number, Example:13092200001

Item	SM OS2				MM
	1310nm		1550nm		850nm
	UPC	APC	UPC	APC	UPC
Insertion Loss	</=0.3dB	</=0.3dB	</=0.3dB	</=0.3dB	</=0.2dB
Return loss	>/=50dB	>/=60dB	>/=50dB	>/=60dB	>/=35dB

Part No.	Fiber Type	Cable	Connector Housing	Boot
410LXX	G.652D	Blue (RAL5012)	Blue	White
A10LXX	G.657A	Blue (RAL5012)	Blue	White
510LXX	62.5/125 OM1	Grey (RAL7004)	Beige	White
610LXX	50/125 OM2	Orange (RAL2011)	Beige	White
710LXX	50/125 OM3	Aqua (RAL6034)	Beige	White
D10LXX	50/125 OM4	Purple (RAL4001)	Beige	White

3	Lable	1
2	LC 0.9mm Connector	1
1	φ0.9mm, LSZH tight-buffered Cable	L
DESCRIPTOPN		Qty

Title	LC/UPC Ø0.9mm LSZH tight-buffered Cable Pigtail						
Ser.No:		Spec:					
Drawing	Kelvin	2013-09-24	Drawing No:				
Check	Bill	2013-09-24	Material:				
Approve	William	2013-09-24	Scale: N/A	Unit: mm	⊕	Ver: 1.00	Page: 1 of 1